



STEP 4



STEP 5

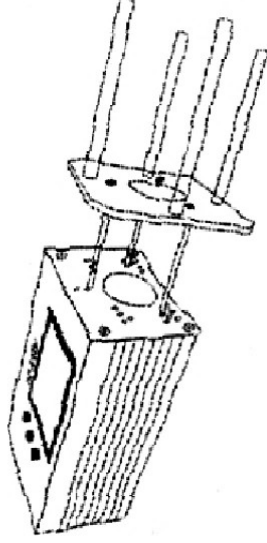

Please recognize HANTE brand.

HANTE Store


<https://hante.aliexpress.com/>

HT-X3000/HT-X3005/HT-X3006 Multi function

precise chronograph instruction

A. Technical parameters

Fierate: 0-3600 shoot/minute
Velocity: 2-1500m/s (5-5000 fps)
Energy: 0-999 J
Range: 0-999 m
Accuracy: error $\leq 0.5\%$
Weight input range: 0.01g-99.99g
Caliber input range: 0.01mm-99.99mm
Main dimensions: HT-X3000/3005: 44*73*33mm HT-X3006: 51*73*39mm
Protection tube diameter: HT-X3000/3005: 17mm HT-X3006: 24mm
Working environment temperature: $-10^{\circ}\text{C}\sim+50^{\circ}\text{C}$

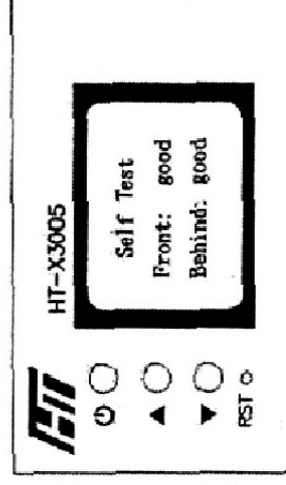

Self Test

HT-X3006: 51*73*39mm
HT-X3006: 24mm

B. Use operation

1. Key function


- Switch key/selector key
- ▲ Move up/voltage display key
- ▼ Move down/enter menu key

2. Power on/off


Press and hold the key ● for 2 seconds to turn the instrument on or off.

3. System Self Test

After starting up, the system will conduct a self-test and display the status of the probe.

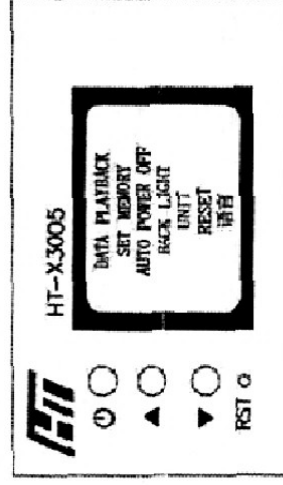


setting menu

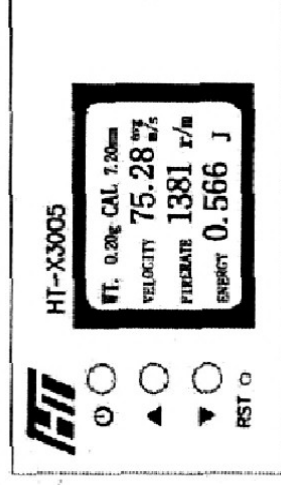

Page 1

4. Page Turning

Short press key ● to Turning Page.
Page 1 displays weight, caliber, velocity, fierate, energy.
Page 2 displays weight, caliber, range, fierate, energy per unit.

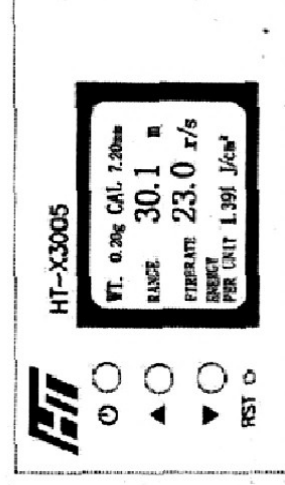

Page 2

5. Check the battery


Press key **▲** to enter the power display interface. When the power is exhausted, it will display low battery, flash warning, and automatically shut down.

6. Test data playback

Press key **▼** to enter the setting menu, move the cursor to 'DATA PLAYBACK', Press key **●** to view, Press key **▲/▼** to page. Press key **●** to exit.

7. Bullet parameter settings


Press key **▼** to enter the setup menu. Move the cursor to 'SET MEMORY' and press key **●** to enter the setting. You can press key **▲/▼** to select the preset six sets of parameters. Press key **●** to confirm and select the arrow in front of the selected parameter. If the preset parameters do not match, you can press key **●** again to modify it. Press key **▲/▼** to increase or decrease the value. Press key **●** again to exit.

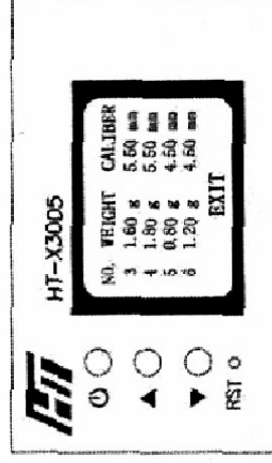

SET MEMORY

8. Shutdown time setting


Press key **▼** to enter the setting menu, move the cursor to 'AUTO POWER OFF', press key **●** to enter the setting. You can press key **▲/▼** to select. Press key **●** to confirm (the arrow). If you do not operate or shoot for a long time, the instrument will shut down automatically when the set time is reached.

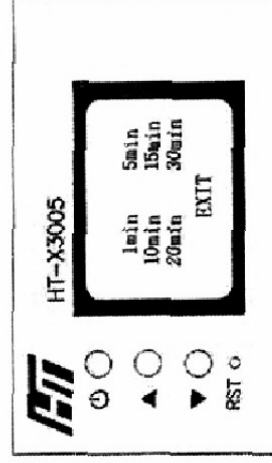

AUTO POWER OFF

9. Backlight settings

Press key **▼** to enter the setting menu, move the cursor to 'BACK LIGHT' and press key **●** to enter the setting. You can press key **▲/▼** to select. Press key **●** to confirm.

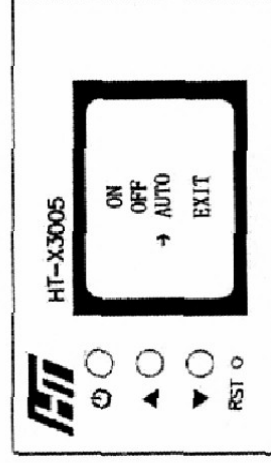


BACK LIGHT

When 'On' is selected, the backlight will be on;

When 'Off' is selected, the backlight will remain off.

When 'Auto' is selected, the backlight automatically turns off when there is no operation or the shooting is over 10 seconds. When there is an operation or shooting, the backlight turns on immediately.

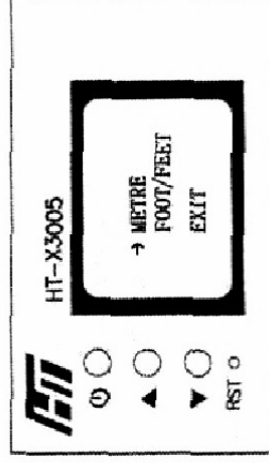


UNIT

10. Unit conversion

Press key **▼** to enter the setting menu, move the cursor to 'UNIT' and press key **●** to enter the setting. Press key **▲/▼** to select. Press key **●** to confirm.


11. Restore factory settings

Press key **▼** to enter the setting menu, move the cursor to 'RESET' and press key **●** to enter the setting. Press key **▲** to move the cursor up, and then press key **●** to confirm, all kinds of parameters will be restored to the factory settings.

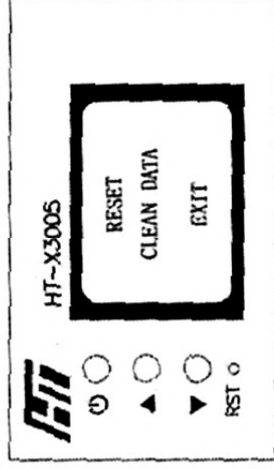

12. Language setting

Press key **▼** to enter the setting menu, move the cursor to 'LANGUAGE' and press key **●** to enter the setting.

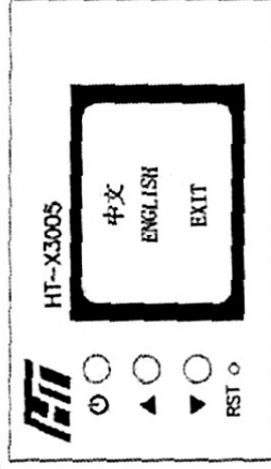


C. Using steps of WIFI/Voice version:

LANGUAGE

1. Turn on the instrument and turn on the wifi settings of your phone or computer.
2. Connect wifi hotspot "HT-X3000", password 888888888
3. Open the browser and enter the web address 8.8.8.8
4. (Press and hold key **▼** for 2 seconds to turn the WIFI on or off.)
(Press and hold key **▲** for 2 seconds to turn the Voice on or off.)

D. Bracket and adapter plate installation

The bracket is used to hold the instrument to the barrel and remain concentric.

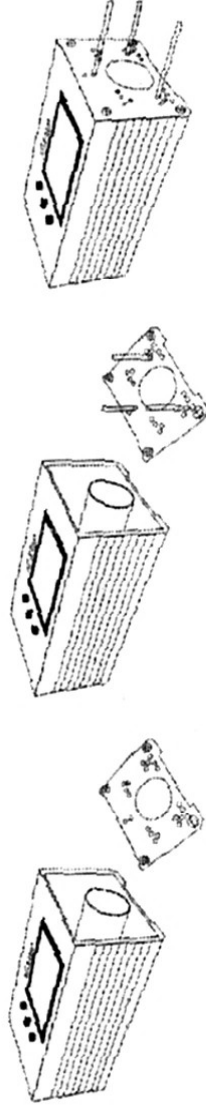

STEP 1

STEP 2

STEP 3